


MG series

Metal Glaze Film Resistor


Metal Glaze Resistors are plated with Metal Glazed film on ceramic rod and then is coated with Epoxy paint. Excellent anti-impulse characteristic and Suitable to pulse circuit. (Power type resistors)

Feature

- Excellent anti-impulse characteristic
- Characteristic is between the solid resistor and the metal film resistor
- Suitable to pulse circuits
- Miniature size (MGS 1/2W, 1W, 2W, 3W) result in 50% space saving
- Coating Color : Epoxy
- MG (Standard) : Blue
- MGS (Mini) : Blue
- Making : Color Coding
- Available Type : TC, TB, TR, TT, M-F, R-F (Please refer to 'Reference 1. TYPE')

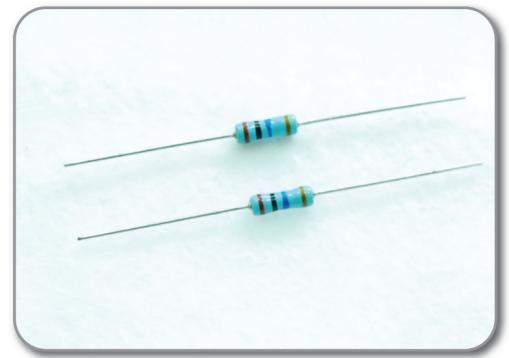

Description

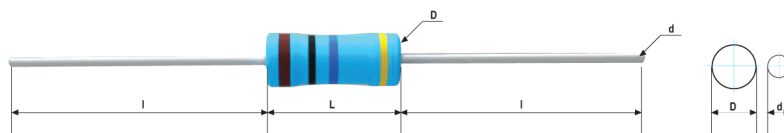

Dimension

Type	Dimension (mm)			
	L	D	l	d
MG 1/4W	6.0±0.5	2.4±0.2	26.0±1.0	0.58±0.05
MGS 1/2W	6.0±0.5	2.4±0.2	26.0±1.0	0.58±0.05
MG 1/2W	9.0±1.0	3.2±0.2	25.0±1.0	0.70±0.05
MGS 1W	9.0±1.0	3.2±0.2	25.0±1.0	0.70±0.05
MG 1W	11.0±1.0	4.0±0.5	30.0±1.0	0.70±0.05
MGS 2W	11.0±1.0	4.0±0.5	30.0±1.0	0.70±0.05
MG 2W	15.0±1.0	5.5±0.5	28.0±1.0	0.80±0.05
MGS 3W	15.0±1.0	5.5±0.5	28.0±1.0	0.80±0.05

*Specifications given herein are changeable under to discuss with user and maybe changed at anytime without prior notice.

Rating


Type	Power Rating(W)	Max Working-Voltage(V)	Max Overload Voltage(V)	Dielectric Withstanding Voltage(V)	Operating Temp.(°C)	Resistance Range(Ω)	Resistance Tolerance (%)
MG 1/4W	1/4	500	1,000	500	-55 ~ +155	47K ~ 400M	F (±1%) G (±2%) J (±5%) K (±10%) L (±15%)
MGS 1/2W	1/2	700	1,000	600			
MG 1/2W	1/2	700	1,000	600			
MGS 1W	1	1,000	1,500	600			
MG 1W	1	1,000	1,500	600			
MGS 2W	2	1,200	1,500	600			
MG 2W	2	1,200	1,500	600			
MGS 3W	3	1,200	1,500	600			

* Glossary of Terms : CC (Carbon Composition)-Carbon film application MG (Metal Glaze)-Metal Glaze Film application


Performance

Test Items	Performance Requirements	Test Methods
Resistance	With specified tolerance	Measure resistance at 25°C
Temperature Coefficient Resistance	±250PPM/°C	+25°C / +125°C
Short Time Over Load	±1%	Rated voltage x 2.5 for 5sec Max overload voltage
Resistance Against Soldering Test	±1%	260±3°C, 2~2.5mm, 5±1sec measure resistance After 1hr at room temp
Load Life in Temperature	±5%	40±2°C, 90~95% RH, 1.5hr ON/0.5hr OFF, 120hr
Load Life in Moisture	±5%	70±2°C, 1.5hr ON/0.5hr OFF, 120hr

Derating Curve

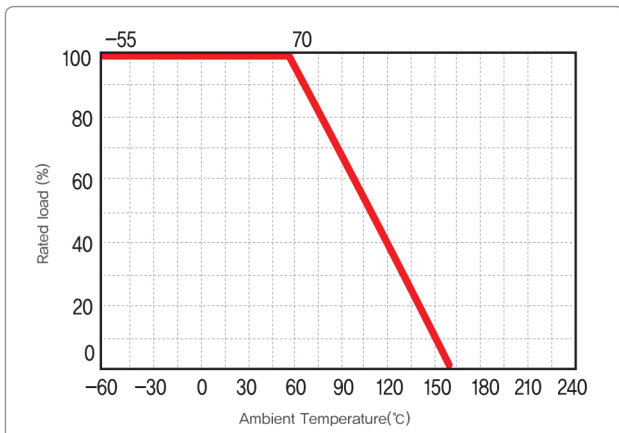

Surface Temperature Rise

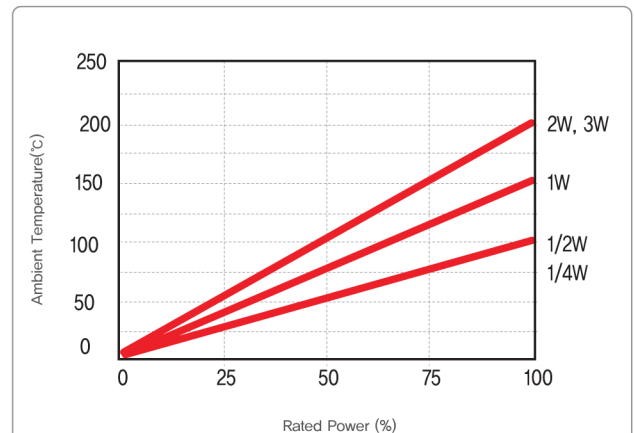

*Specifications given herein are changeable under to discuss with user and maybe changed at anytime without prior notice.